

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:

1 Amp

Insulator Resistance:

1000 Megohms Min.

Contact Resistance:

30 m ohms Max.

Voltage:

AC 250V

Operating Temperature :

-40°C ~ +105°C

Contact Material:

Copper Alloy

Insulator Material:

PBT UL94V-0

Finish:

Gold plated

RoHS Compliance

Ordering information:

27S1001-OPS45-01X-X

Contact Plating

01 Normal

10 10 μ "

∴ ∴

G Gold Plated

T Tin Plated (每次數量20K)


COLOR

R RED


B Black

U Blue (每次數量60K)


A Gray (每次數量60K)



CONTACT PITCH

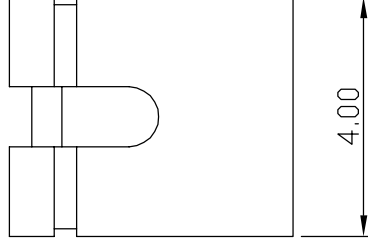

4.00

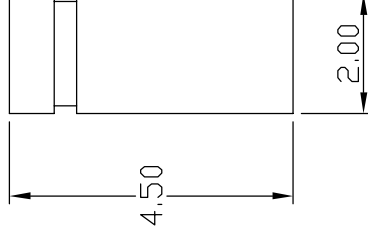

4.50

2.00

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE	2.00mm MINI JUMP	CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO	27S1001-OPS45-01X-X			0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	96.01.04			



8