

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:

3 Amp

Insulator Resistance:

1000 Megohms Min.

Contact Resistance:

30 m ohms Max.

Voltage:

AC 650V

Operating Temperature :

-40°C ~ +105°C

Contact Material:

Copper Alloy

Insulator Material:

PBT UL94V-0

Finish:

Gold plated

RoHS Compliance

Ordering information:

27S1003-CLS65-01G-X

Contact Plating

01 Normal

10 10 μ "

:

:

G Gold Plated

T Tin Plated

H Duplex plated

COLOR

R RED

O ORANGE

Y YELLOW


G GREEN

U BLUE

W WHITE

CONTACT PITCH

2.54

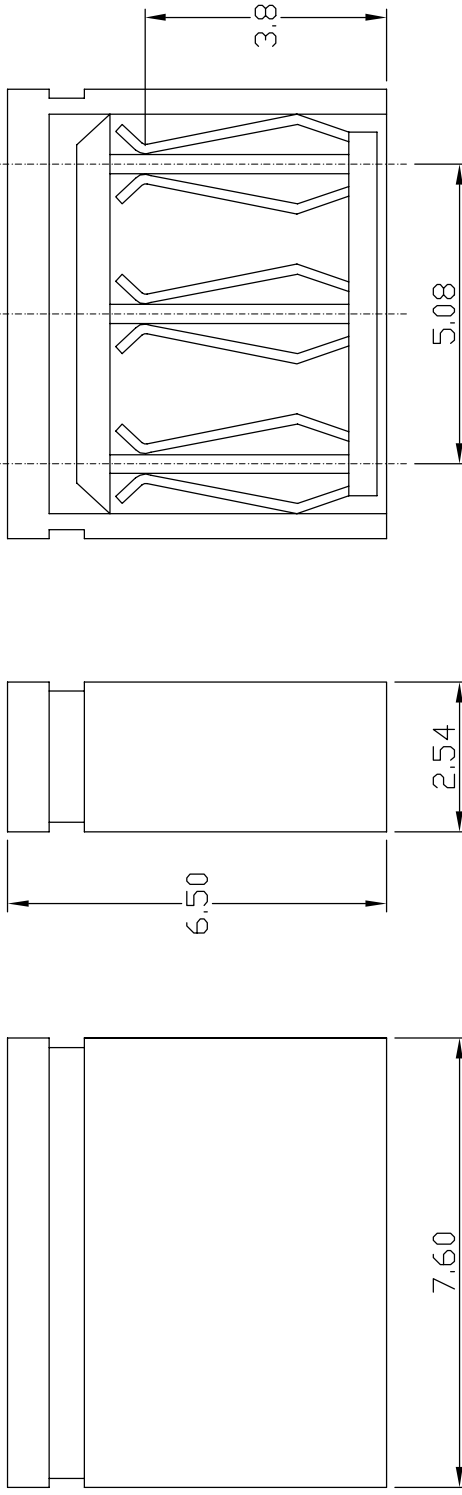

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE	2.54mm MINI JUMP	CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO	27S1003-CLS65-01G-X	DR.		0.00±0.25	SHEET	1/1
UNIT	mm(INCH)	PROJECT				
		KEN				
		96.01.04				

