

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:

3 Amp

Insulator Resistance:

1000 Megohms Min.

Contact Resistance:

30 m ohms Max.

Voltage:

AC 650V

Operating Temperature :

-40°C ~ +105°C

Contact Material:

Copper Alloy

Insulator Material:

PBT UL94V-0

Finish:

Gold plated

RoHS Compliance

Ordering information:

27S2002-10PCS-01G-X

Contact Plating

01 Normal

10 10 μ"


∴ ∴

G Gold Plated

T Tin Plated

H Duplex plated

COLOR
B Black

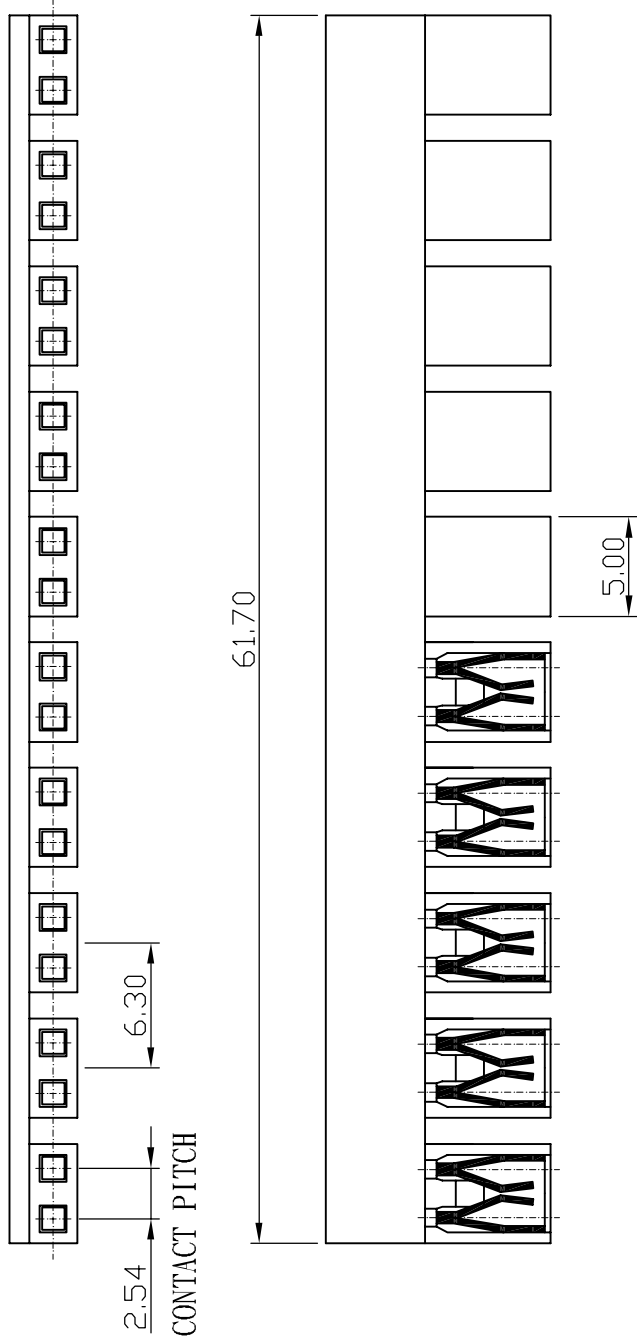

Ref.

APP.		ANGLES	±3°	SIZE	A4
CHK.		LINEAR	0.0 ±0.38	SCALE	3:1
DR. KEN			0.00±0.25	SHEET	1/1
PROJECT		UNIT	mm(INCH)	96.01.04	
TITLE		成品規格圖			
PART NO		27S2002-10PCS-01G-X			
DRW NO					
PROJECT		KEN			

