

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:

3 Amp

Insulator Resistance:

1000 Megohms Min.

Contact Resistance:

30 m ohms Max.

Voltage:

AC 650V

Operating Temperature :

-40°C ~ +105°C

Contact Material:

Copper Alloy

Insulator Material:

PBT UL94V-0

Finish:

Gold plated

RoHS Compliance

Ordering information:

27S1002-CLS65-01G-X

Contact Plating

01 Normal

10 10^μ"

:

:

G Gold Plated

T Tin Plated

H Duplex plated

COLOR

R RED

O ORANGE


Y YELLOW

G GREEN

U BLUE


W WHITE

B Black




2.54

CONTACT PITCH

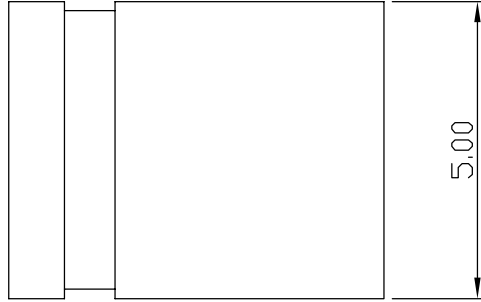

5.00

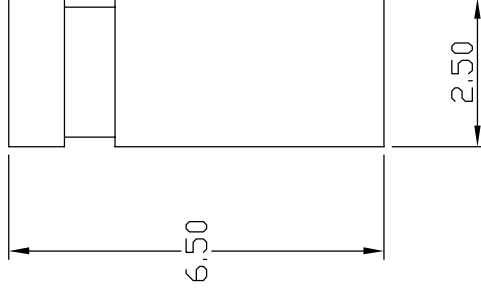

6.50

2.50

Ref.

APP.		ANGLES	±3°	SIZE	A4
CHK.		LINEAR	0.0 ±0.38	SCALE	3:1
DR. KEN			0.00±0.25	SHEET	1/1
UNIT mm(INCH)		PROJECT		96.01.04	
TITLE 成品規格圖		PROJECT		96.01.04	
PART NO 27S1002-CLS65-01G-X		PROJECT		96.01.04	
DRW NO		PROJECT		96.01.04	
UNIT mm(INCH)		PROJECT		96.01.04	



8