REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

Ordering information:

27S1002-CLS87-01G-B

- Contact Plating
  - 01 Normal
  - 10 10μ"
  - ⋮ ⋮
  - G Gold Plated
  - T Tin Plated
  - H Duplex plated
- COLOR
  - B Black

SPECIFICATIONS

Current Rating:
3 Amp
Insulator Resistance:
1000 Megohms Min.
Contact Resistance:
30 m ohms Max.
Voltage:
AC 650V
Operating Temperature :
-40℃ ~ +105℃
Contact Material:
Copper Alloy
Insulator Material:
PBT UL94V-0
Finish:
Gold plated

RoHS Compliance



CONTACT PITCH

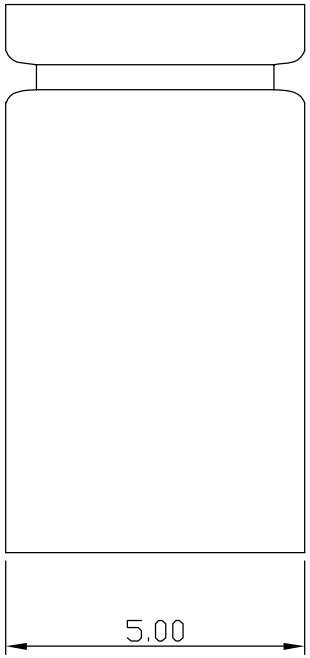

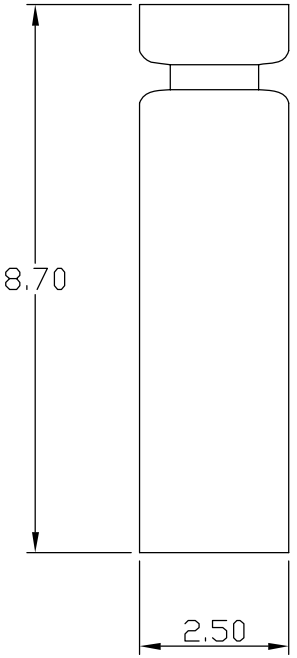

Ref.

成品規格圖		APP.		ANGLES	±3°	SIZE	A4
				LINEAR	0.0 ±0.38	SCALE	3:1
TITLE	2.54mm MINI JUMP	CHK.			0.00±0.25	SHEET	1/1
PART NO	27S1002-CLS87-01G-B						
DRW NO		DR.	KEN				
UNIT	mm(INCH) PROJECT		96.01.04				

JVE GLOBAL