

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
3 Amp

Insulator Resistance:
1000 Megohms Min.

Contact Resistance:
30 m ohms Max.

Voltage:
AC 650V

Operating Temperature :
-40°C ~ +105°C

Contact Material:
Copper Alloy

Insulator Material:
PBT UL94V-0

Finish:
Gold plated

RoHS Compliance

Ordering information:


27S1002-OPS45-01G-X

Contact Plating


01 Normal
10 10 μ "
: :
: :

COLOR
R RED
Y YELLOW


G Gold Plated
T Tin Plated
H Duplex plated



CONTACT PITCH

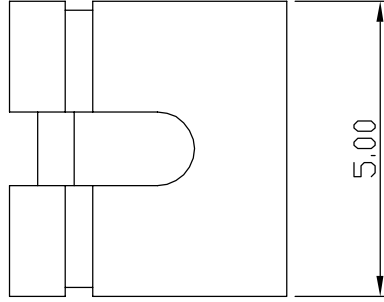

5.00

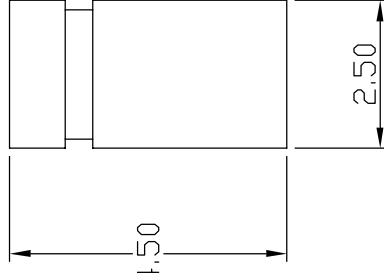

4.50

2.50

Ref.

APP.		ANGLES	±3°	SIZE	A4
CHK.		LINEAR	0.0 ±0.38	SCALE	3:1
DR. KEN			0.00±0.25	SHEET	1/1
PROJECT					
mm(INCH)					
96.01.04					
TITLE		成品規格圖			
PART NO		27S1002-OPS45-01G-X			
DRW NO					
UNIT		96.01.04			