

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:

3 Amp

Insulator Resistance:

1000 Megohms Min.

Contact Resistance:

30 m ohms Max.

Voltage:

AC 650V

Operating Temperature :

-40°C ~ +105°C

Contact Material:

Copper Alloy

Insulator Material:

PBT UL94V-0

Finish:

Gold plated

RoHS Compliance

Ordering information:


27S1002-OPS60X-01G-X

B BRASS
P PHOSPHOR BRONZE

COLOR
R RED
Y YELLOW
U BLUE
B BLACK


Contact Plating

01 Normal
10 10 μ "
: :
: :
: :




2.54

CONTACT PITCH

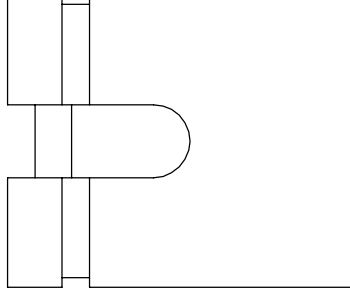

5.00

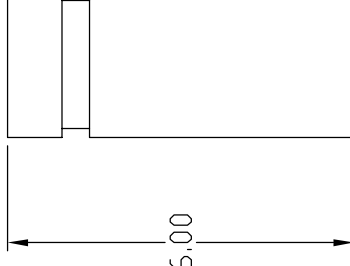

6.00

2.50

Ref.

APP.		ANGLES	±3°	SIZE	A4
成品規格圖		LINEAR	0.0 ±0.38	SCALE	3:1
TITLE 2.54mm MINI JUMP			0.00±0.25	SHEET	1/1
PART NO 27S1002-OPS60X-01G-X					
DRW NO		DR.	KEN		
UNIT mm(INCH)		PROJECT	96.01.04		



8