



Ordering information:
27S1002-OPS80-01G-X

Contact Plating
01 Normal
10 10 μ"
∴ ∴ ∴
G Gold Plated
T Tin Plated
H Duplex plated

COLOR
B Black



CONTACT PITCH
2.54

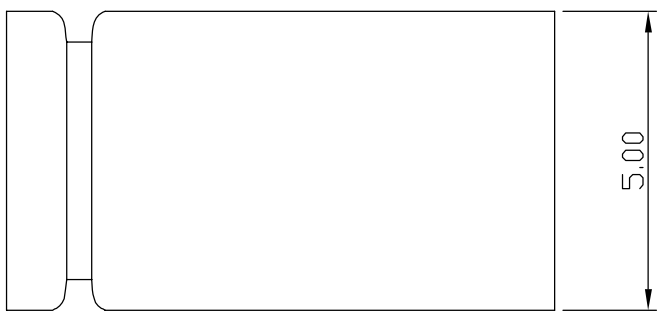

5.00



8.00

2.50

Ref.

SPECIFICATIONS

Current Rating: 3 Amp

Insulator Resistance: 1000 Megohms Min.

Contact Resistance: 30 m ohms Max.

Voltage:

AC 650V

Operating Temperature :

-40°C ~ +105°C

Contact Material:

Copper Alloy

Insulator Material:

PBT UL94V-0

Finish:

Gold plated

RoHS Compliance

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE	2.54mm MINI JUMP	CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO	27S1002-OPS80-01G-X			0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	96.01.04			



Grid labels: 1, 2, 3, 4, 5, 6, 7, 8 (columns); A, B, C, D, E, F, G, H (rows)