REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

Ordering information:

22L6730-07S10X-XXX

- Number of Contact: 7
- Color
- Contact Plating
  - 01 Normal
  - 10 10μ"
  - ⋮ ⋮
- G Gold Plated
- T Tin Plated
- H Duplex plated

SPECIFICATIONS

Current Rating:
1.0 Amp

Insulator resistance:
1000 Megohms Min. AT DC 100V

Dielectric withstanding:
AC 500V/minute, 1mA

Operating Temperature:
-40°C ~ +105°C

Contact Material:
Phosphor Bronze

Insulator Material:
Standard: LCP UL94V-0
Color: Black

platung:
Contact area:
Gold flash plating 0.8μ" min.
over 30~50μ" Nickel (Ref.)
Solder area:
Tin/Lead plating 80~120μ" (Ref.)
over 30~50μ" Nickel (Ref.)

RoHS Compliance

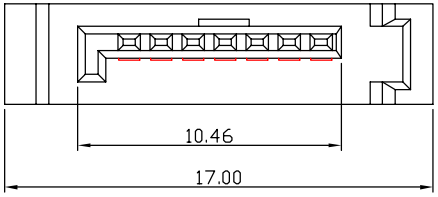

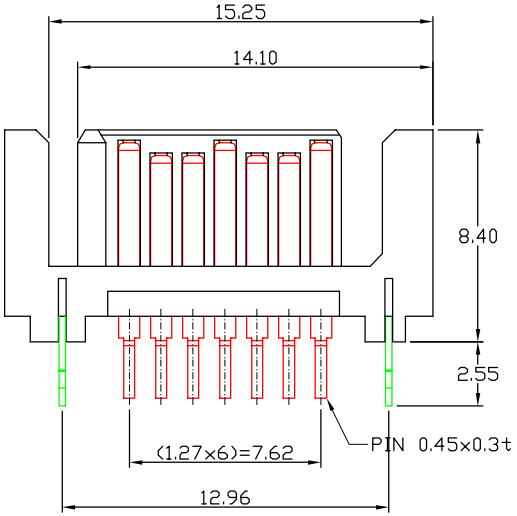

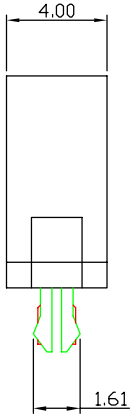

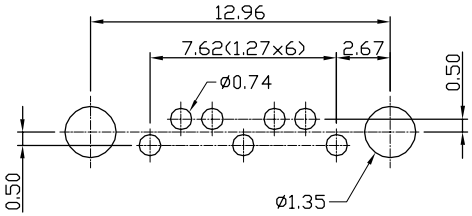

RECOMMENDED P.C.B. LAYOUT

Ref.

成品規格圖		APP.		ANGLES	±3°	SIZE	A4
				LINEAR	0.0 ±0.38	SCALE	3:1
TITLE	SATA High 8.40	CHK.			0.00±0.25	SHEET	1/1
PART NO	22L6730-07S10X-XXX						
DRW NO		DR.	KEN				
UNIT	mm(INCH) PROJECT		96.01.04				

JVE GLOBAL