

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

Ordering information:

22P6731-22M10B-XXX-C-02

Number of Contact 22 Color

- G Gold Plated
- T Tin Plated
- H Duplex plated
- Contact Plating
- 01 Normal
- 10 10 μ "

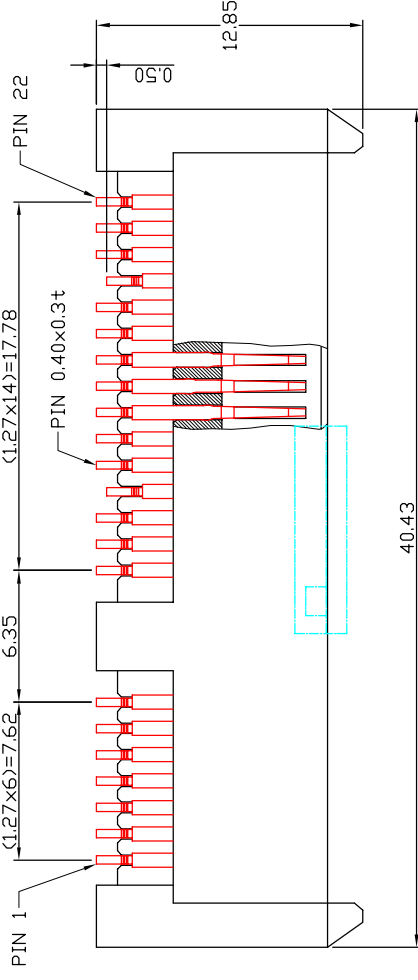

40.43


PIN 1 (1.27x6)=7.62 6.35 (1.27x14)=17.78

SPECIFICATIONS

1. MATERIAL:
 HOUSING: THERMOPLASTIC, HIGH TEMP, 30% G/F
 COLOR: BLACK
 CONTACT: PHOSPHOR BRONZE
 BOARDLOCK: BRASS

2. FINISH
 CONTACT: GOLD PLATING ON CONTACT AREA
 100 μ ' MIN. TIN PLATING ON SOLDERTAIL
 50 μ ' MIN. NICKEL UNDERPLATING OVER
 BOARDLOCK: 50 μ ' MIN.
 NICKEL PLATING OVER ALL

RoHS Compliance

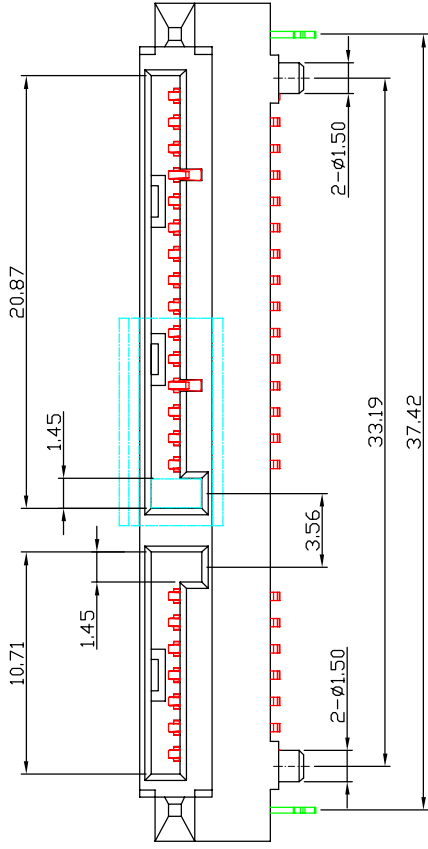


20.87

10.71

1.45

1.45

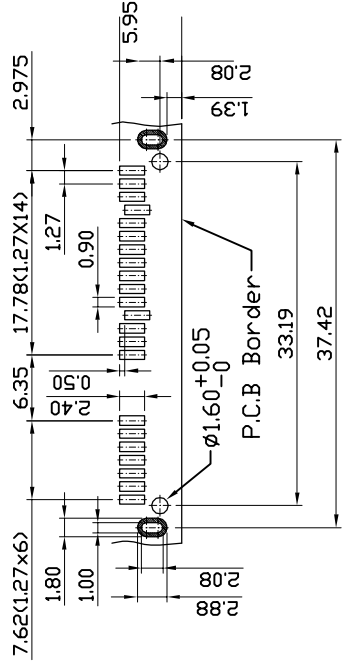

7.62(1.27x6) 6.35

1.80

1.00

1.27

0.90

2.975

5.95

1.60


33.19

37.42

Ø1.60+0.05 P.C.B Border

33.19

37.42

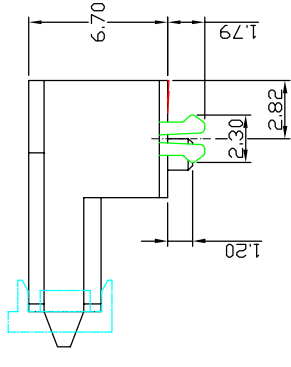

6.70

1.27

2.30

2.82

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE		SATA High 6.7(Under Board)	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO		22P6731-22M10B-XXX-C-02		0.00±0.25	SHEET	1/1
DRW NO						
UNIT		mm(INCH)	PROJECT			
		DR.	KEN			
				96.01.04		



RECOMMENDED P. C. B. LAYOUT

1 2 3 4 5 6 7 8