
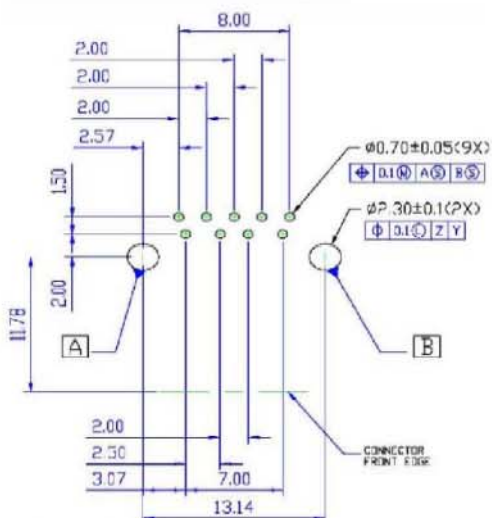
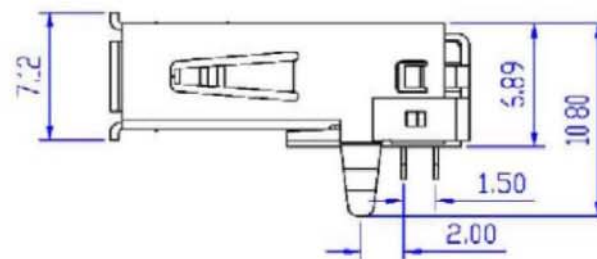
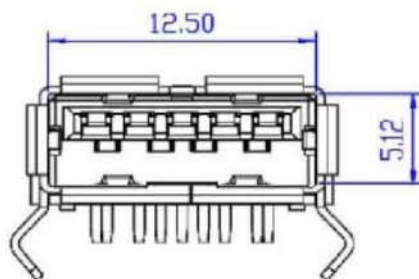
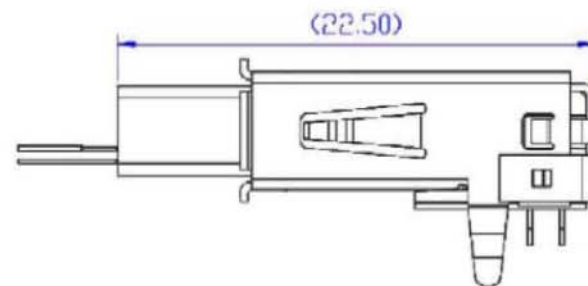


| REV. | DESCRIPTION | DRW. | CHK. | APP. | DATE |
|------|-------------|------|------|------|------|
| A | RELEASE | | | | |

NOTE:

- MATERIAL**
HOUSING : GLASS FILLED HEAT-RESISTED RESIN,UL94V-0.
TERMINAL : COPPER ALLOY.
SHIELD : COPPER ALLOY
REAR SHIELD : COPPER ALLOY
- PLATING**
TERMINAL : <CONTACT AREA> GOLD.
<SOLDER TAIL AREA> GOLD.
<UNDER-PLATING> NICKEL.
SHELL PLATING: NICKEL
REAR SHELL PLATING: NICKEL
- MECHANICAL CHARACTERISTICS:**
INSERTION FORCE:35N(MAX)
EXTRACTION FORCE:8N(MIN) AFTER DURABILITY CYCLES
DURABILITY CYCLE:1500 CYCLES;
- ELECTRICAL CHARACTERISTICS:**
CURRENT RATING: 1.5A;
VOLTAGE RATING: 30VAC (R.M.S.)
CONTACT RESISTANCE:30m OHMS MAX;
INSULATION RESISTANCE:
a) UNMATED:100M OHMS MIN.
b) MATED:100M OHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE:100V AC/1MINUTE
OPERATING TEMPERATURE:-55°C ~ +85°C
STORAGE TEMPERATURE:-40°C ~ +60°C
OPERATION /STORAGE HUMIDITY:95% OR LESS
- ORDER INFORMATION:**

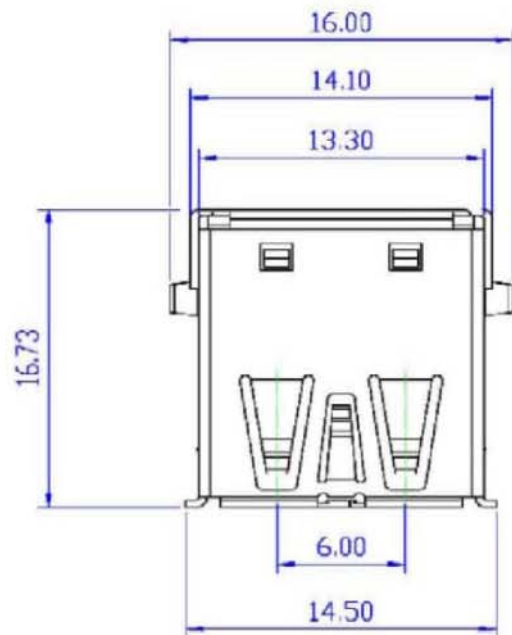

PCB TOLERANCE: ± 0.05 , THICKNESS: 1.2 mm
RECOMMENDED PCB LAYOUT(TOP VIEW)

RoHS Compliant

Ref. 參考圖面

| 成品規格圖 | | APP. | ANGLES | $\pm 3^\circ$ | SIZE | A4 |
|---------|--------------------|---------|----------|-----------------|-------|-----|
| TITLE | USB 3.0 Receptacle | CHK. | LINEAR | 0.0 ± 0.38 | SCALE | 4:1 |
| PART NO | 27UBP10 09A | | | 0.00 ± 0.25 | SHEET | 1/1 |
| DRWNO | 270193 | DR. | Ken Wang | | | |
| UNIT | mm(INCH) | PROJECT | 98.02.10 | | | |

