

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				
B	增修料號	王日勝	黃秀萍	陳國樑	96.01.08
C	修正圖面及電氣特性	王日勝	溫麗香	朱添進	96.07.05

Ordering information:

Δ_B 24W1170-XXS1X-01T

Poles 02~20

COLOR
0 Standard Natural
R Red
U Blue

SPECIFICATIONS

- Current Rating: 2 AC, DC
- Voltage Rating: 250 AC, DC
- Insulator resistance: 1000 Megohms Min.
- Contact Resistance: 10 m ohms Max.
- Dielectric withstanding: AC 1000V/minute
- Operating Temperature: $-25^{\circ} \sim +85^{\circ}C$




Contact Material: Brass

Insulator Material: Nylon 66 UL94V-0

Color: Natural(White)

Finish: Tin Plated

RoHS Compliant

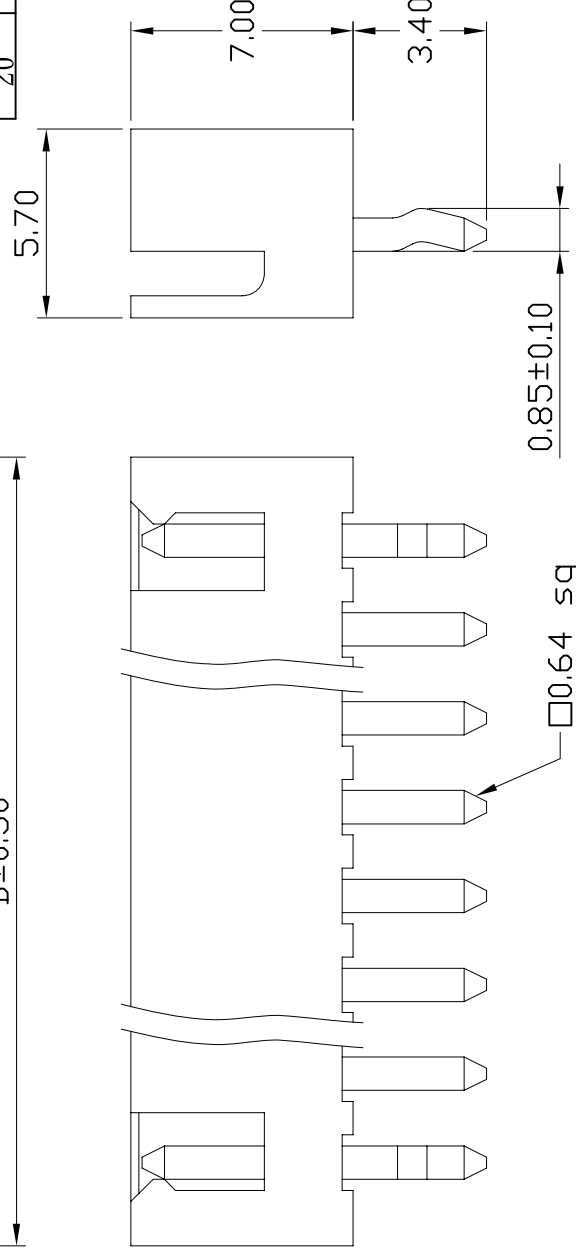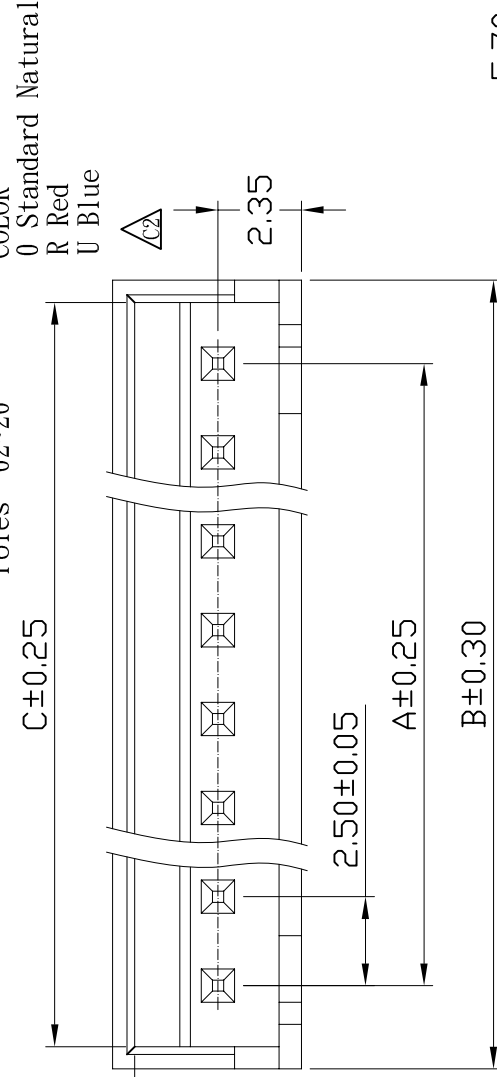

成品規格圖

TITLE 2.50mm Wafer with Box
PART NO 24W1170-XXS1X-01T
DRW NO 24W0005

RECOMMENDED P. C. B. LAYOUT

APP.	ANGLES	±3°	SIZE
	LINEAR	0.0 ±0.38	SCALE 3:1
		0.00±0.25	SHEET 1/1



DR. 王慧芬
UNIT mm(INCH) PROJECT 89.07.21

Cir-cuits	Dimension mm		
	A	B	C
02	2.50	7.50	6.10
03	5.00	10.00	8.60
04	7.50	12.50	11.10
05	10.00	15.00	13.60
06	12.50	17.50	16.10
07	15.00	20.00	18.60
08	17.50	22.50	21.10
09	20.00	25.00	23.60
10	22.50	27.50	26.10
11	25.00	30.00	28.60
12	27.50	32.50	31.10
13	30.00	35.00	33.60
14	32.50	37.50	36.10
15	35.00	40.00	38.60
16	37.50	42.50	41.10
17	40.00	45.00	43.60
18	42.50	47.50	46.10
19	45.00	50.00	48.60
20	47.50	52.50	51.10