REV.	DESCRIPTION	DRW.	CHK.	chonge	DATE
A	RELEASE				

24W1190-XXS10-XXX-A

Number of Contact
02~16

Contact Plating
01 Normal
10 10μ"
G Gold Plated
T Tin Plated
H Duplex Plated

Cir-cuits	Dimension mm L1	L2
2	3.96	7.86
3	7.92	11.82
4	11.88	15.78
5	15.84	19.74
6	19.80	23.70
7	23.76	27.66
8	27.72	31.62
9	31.68	35.58
10	35.64	39.54
11	39.60	43.50
12	43.56	47.46
13	47.52	51.42
14	51.48	55.38
15	55.44	59.34
16	59.40	63.30

SPECIFICATIONS

Current Rating:
7A AC, DC

Voltage Rating:
250 V AC, DC

Insulator resistance:
1000 Megohms Min.

Dielectric withstanding:
AC 1000V/minute

Operating Temperature:
-25° ~ +85°C

Contact Material:
Brass

Insulator Material:
Nylon-66 UL94V-0
Color: White

Finish:
Gold, Tin or Duplex plated
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliant

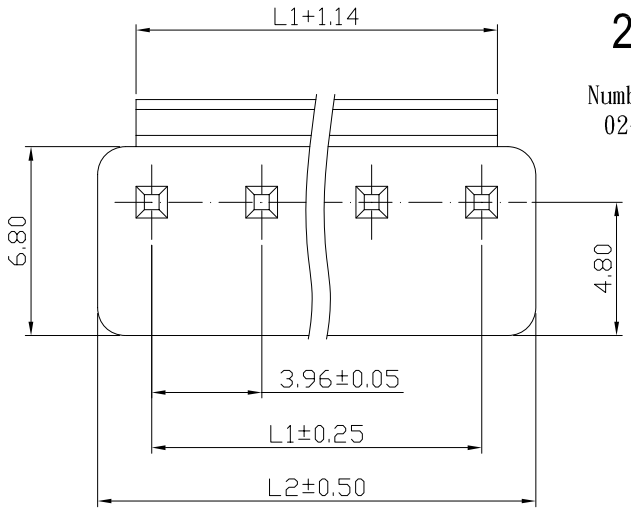

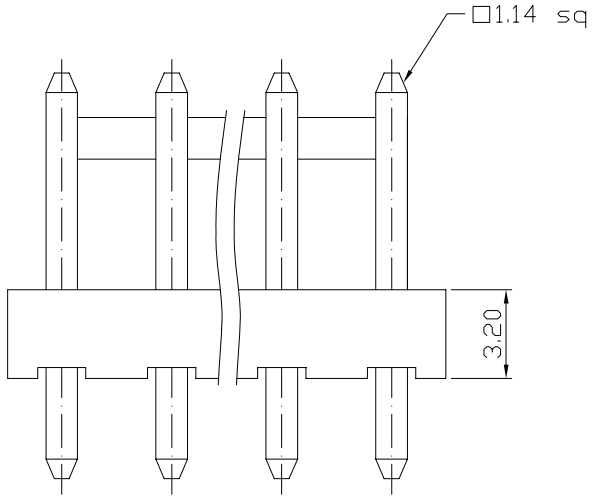

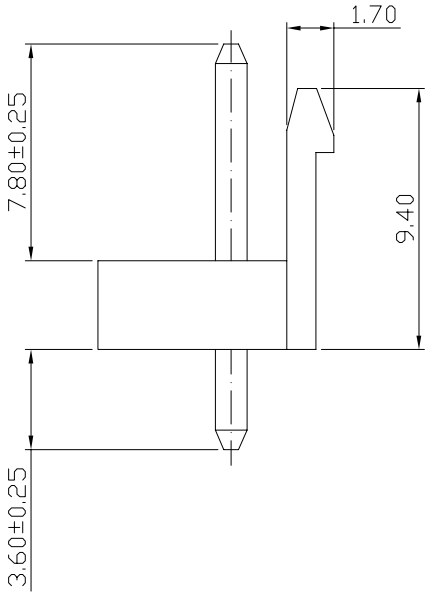

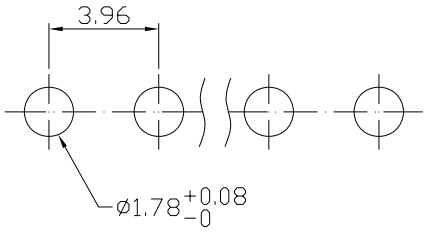

RECOMMENDED P.C.B. LAYOUT
TOLERANCE±0.05

成品規格圖			APP.		ANGLES	±3°	SIZE A4
					LINEAR	0.0 ±0.38	SCALE 4:1
TITLE	PH3.96mm Wafer JST VH		CHK.			0.00±0.25	SHEET 1/1
PART NO	24W1190-XXS10-XXX-A						
DRW NO	24W0078		DR.	KEN			
UNIT	mm(INCH)	PROJECT		96.07.31			

JVE GLOBAL