

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				
B	增修圖面標註	KEN	王月娥	黃銘傳	97.06.18

**SPECIFICATIONS**



Current Rating:  
2 Amp

Voltage Rating:  
100 AC

Insulator resistance:  
1000 Megohms Min.

Contact Resistance:  
20 m ohms Max.

Dielectric withstanding:  
AC 800V/minute

Operating Temperature:  
-25° ~ +85°C

Contact Material:  
Brass

Insulator Material:  
Nylon 66 UL94V-0+GF

Color: Natural (White)

Finish:  
Tin Plated or Gold Filled

**ROHS Compliant**

**Ordering information:**

24W1140-XXS1X-01X




Pins 02~16

Color: 0=Natural (White)


G Gold Plated

T Tin Plated

Cir-cuits	Dimension mm	
	Dim. A	Dim. B
2	2.00	6.04
3	4.00	8.04
4	6.00	10.04
5	8.00	12.04
6	10.00	14.06
7	12.00	16.06
8	14.00	18.08
9	16.00	20.08
10	18.00	22.10
11	20.00	24.10
12	22.00	26.12
13	24.00	28.12
14	26.00	30.14
15	28.00	32.14
16	30.00	34.14

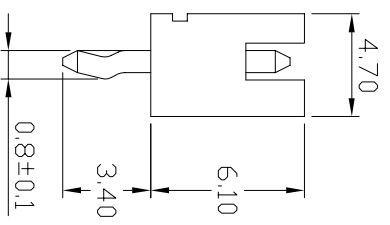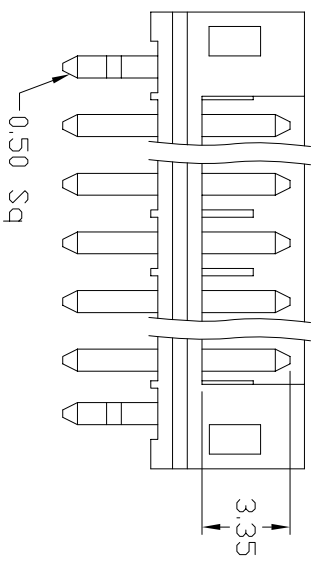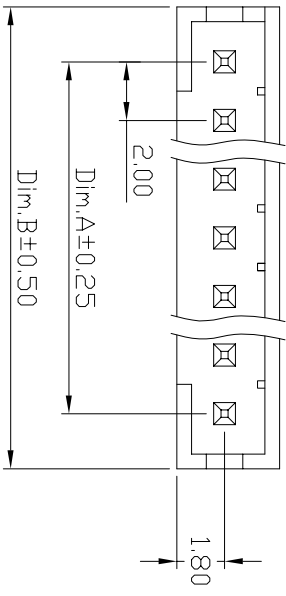

2.00±0.05



**成品規格圖**

TITLE	2.00mm Wafer Straight Type	CHK.
PART NO	24W1140-XXS1X-01X	
DRW NO	24W0008	DR.
UNIT	mm(INCH)	PROJECT

ANGLES	±3°	SIZE	A4
LINEAR	0.0 ±0.50	SCALE	4:1
	0.00±0.25	SHEET	1/1

RECOMMENDED P. C. B. LAYOUT



DRW NO	24W0008	DR.	王慧芬
UNIT	mm(INCH)	PROJECT	89.07.21