

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE		
A	RELEASE						

SPECIFICATIONS

Current Rating:  
2 Amp  
Voltage Rating:  
250 V  
Operating Temperature:  
-25° ~ +85°C  
Contact Resistance:  
20m Max.  
Insulation Resistance:  
1000M Min  
Terminal Material:  
Brass/Tin-plated/Gold-plated  
Insulator Material:  
Nylon-66, UL94V-0


Ordering information:  
24W2140-XXS10-XXX

Number of Contact  
06-40




G Gold Plated  
T Tin Plated  
H Duplex Plated

Contact Plating

01 Normal  
10 10u"  
15 15u"  
:

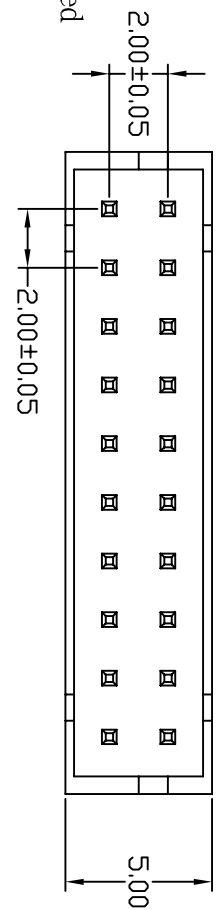

Cir-cuits	Dimension mm	
	L1	L2
2x3	4.00	7.90
2x4	6.00	9.90
2x5	8.00	11.90
2x6	10.00	13.90
2x7	12.00	15.90
2x8	14.00	17.90
2x9	16.00	19.90
2x10	18.00	21.90
2x11	20.00	23.90
2x12	22.00	25.90
2x13	24.00	27.90
2x14	26.00	29.90
2x15	28.00	31.90
2x16	30.00	33.90
2x17	32.00	35.90
2x18	34.00	37.90
2x19	36.00	39.90
2x20	38.00	41.90

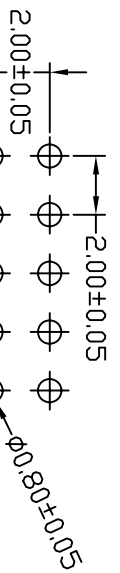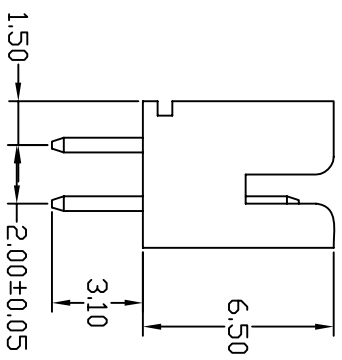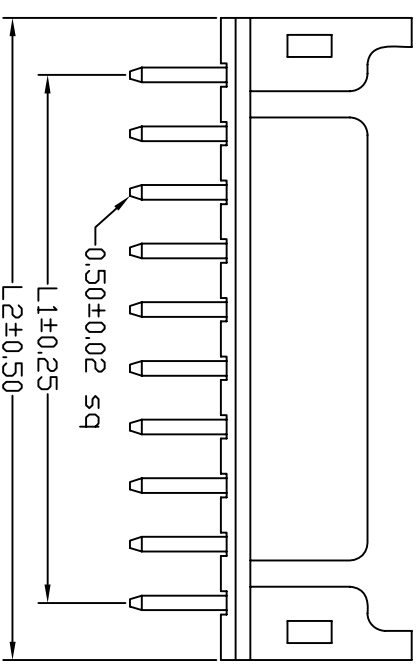

成品規格圖

成品規格圖		APP.			ANGLES	±3°	SIZE	A4
TITLE	2.00mm Wafer Dual Row Type	CHK.			LINEAR	0.0 ±0.38	SCALE	4:1
PART NO	24W2140-XXS10-XXX					0.00±0.25	SHEET	1/1
DRW/NO	24W0053							
UNIT	mm(INCH)	PROJECT	◎	▽	DR.	古惠如		
						94.09.30		

