REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Voltage Rating:
250 V AC/DC
Current Rating:
2 Amp AC/DC
Insulator Resistance:
1000 Megohms Min.
Dielectric Withstanding Voltage:
1000 V AC/minute
Temperature Rating:
-40°C~ +75°C
Current Resistance:
20m Max.
Contact Material:
Brass
Insulator Material:
Nylon-66 UL94V-0
Color: White
Finish:
Tin plated

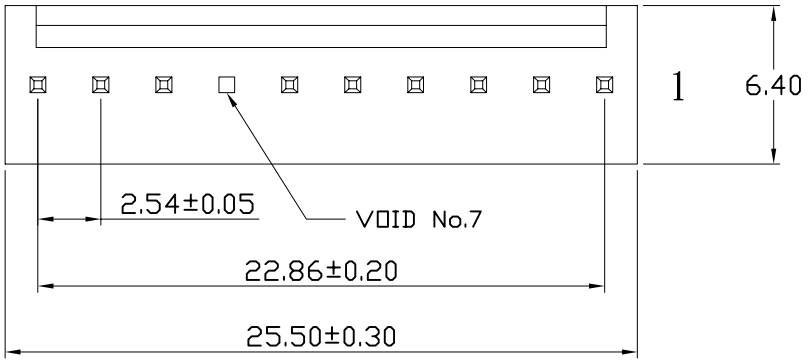

Ordering infomation:

24W1161-10S10-01T-V7K

Number of Contact
02~20

Contact Plating
01 Normal
10 10μ"

G Gold Plated
T Tin Plated
H Duplex Plated

VOID No.XX

兩側打KINK

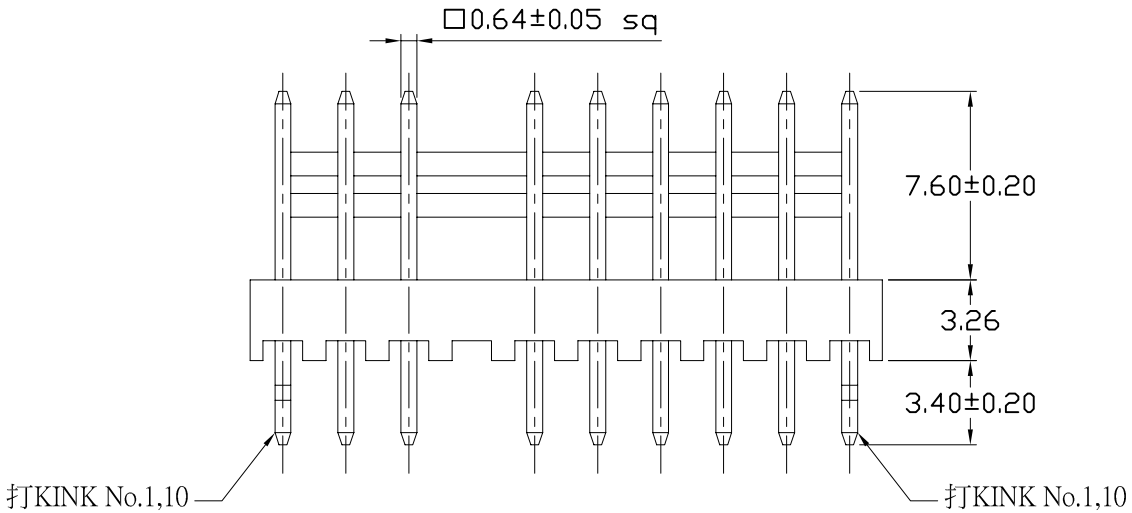

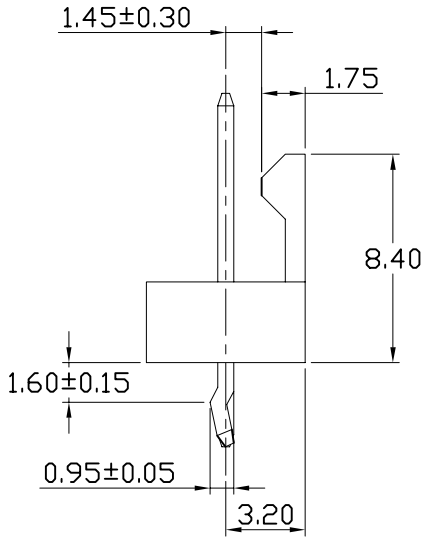

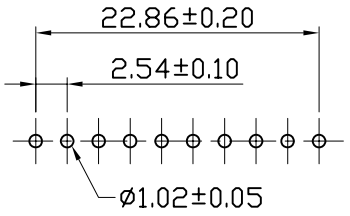

RECOMMENDED P.C.B. LAYOUT

成品規格圖			APP.		ANGLES	±3°	SIZE	A4
					LINEAR	0.0 ±0.38	SCALE	4:1
TITLE	2.54mm Wafer Straight Typ		CHK.			0.00±0.25	SHEET	1/1
PART NO	24W1161-10S10-01T-V7K							
DRW NO	24W0065		DR.	KEN				
UNIT	mm(INCH)	PROJECT		95.08.30				

IVE GLOBAL