REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				
B	增修料號	Ken Wang	耿淑華	陳國樑	97.11.07
C	修正電鍍	Hill Chang	耿淑華	陳國樑	98.06.15

SPECIFICATIONS

Current Rating:
3 Amp
Voltage Rating:
250V
Insulator resistance:
1000 MΩ Min.
Contact Resistance:
20 mΩ Max.
Dielectric withstanding:
AC 1000V/minute
Operating Temperature:
-40° ~ +75°C
Contact Material:
Brass
Insulator Material:
Nylon-6T UL94V-0
Color: Natural
Finish:
Tin plated

RoHS Compliant

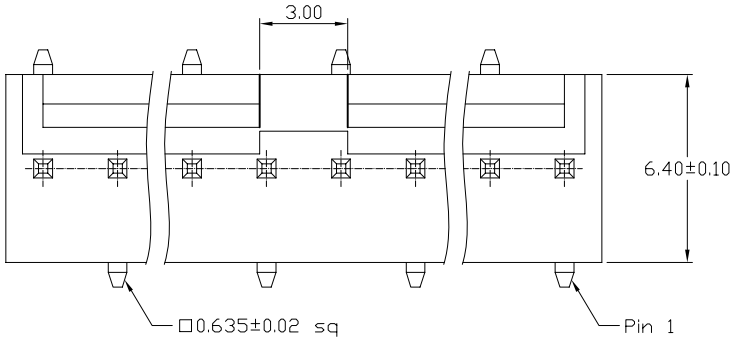

Ordering information:

24W1162-XXM2X-XXX-A

- Number of Contact: 02~15
- COLOR: 0 Standard Natural
- Contact Plating: 01 Normal; 10 10μ"; 11 Normal Matte Tin; ⋮ ⋮
- G Gold Plated; T Tin Plated; H Duplex plated
- A TYPE A

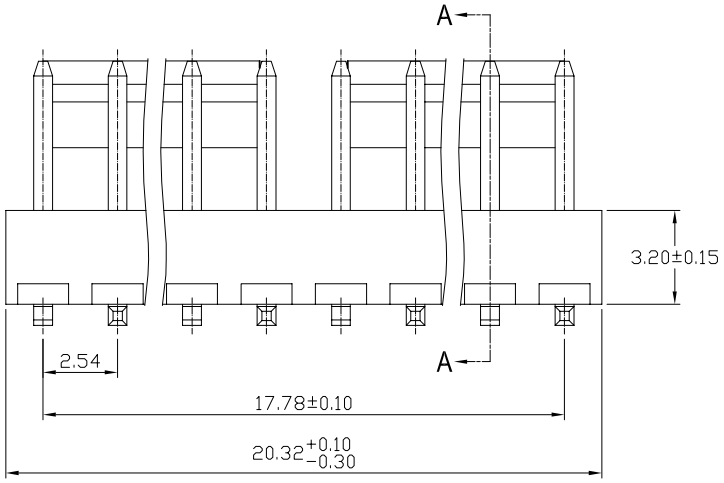

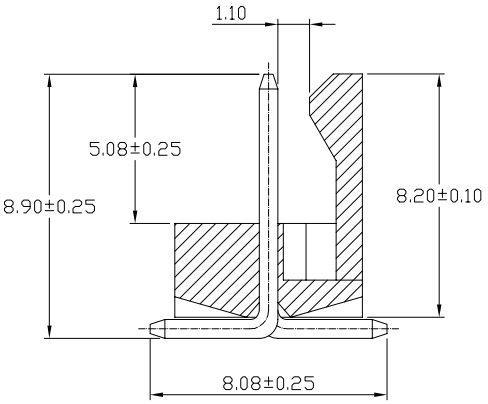

Section A-A



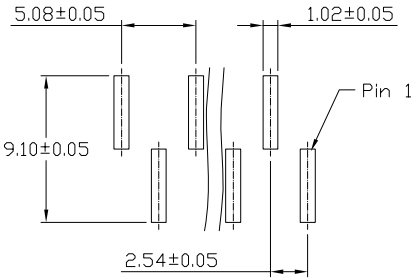

RECOMMENDED P.C.B. LAYOUT

成品規格圖			APP.		ANGLES	±3°	SIZE	A4
					LINEAR	0.0 ±0.38	SCALE	3:1
TITLE	2.54mm Wafer SMD Type		CHK.			0.00±0.25	SHEET	1/1
PART NO	24W1162-08M20-11T-A							
DRW NO	24W0002		DR.	王慧芬				
UNIT	mm(INCH)	PROJECT		89.07.21				

JVE GLOBAL