

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				
B	料號變更	王慧芬	王麗娟	陳國樑	92.05.13
C	修正圖面及標註	王慧芬	王麗娟	陳國樑	97.11.28

MATERIAL:

Housing Material : Nylon-6T UL94V-0

Color: Beige

PIN : Cooper ALLOY

Finished : Tin Plated

SPECIFICATION:

Voltage Rating : 125V AC/DC

Current Rating : 1 AC/DC

Insulator resistance : 1000 MΩ Min.

Contact Resistance : 20 mΩ Max.

Withstanding Voltage : 250 V AC/Minute




Operating Temperature : -40°C T0 +85°C

RoHS Compliant


Ordering information:
24W1251-XXR10-01T

Number of Contacts
02~15

Cir-cuits	Dimension mm	
	L1	L2
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

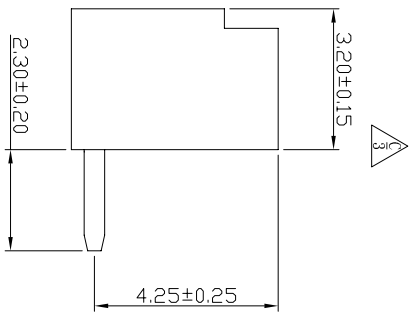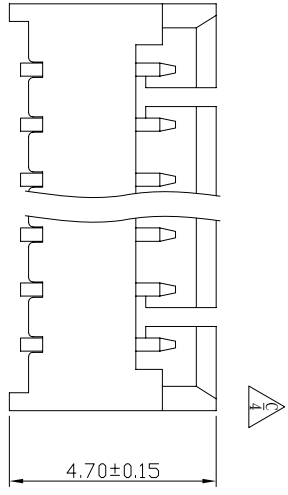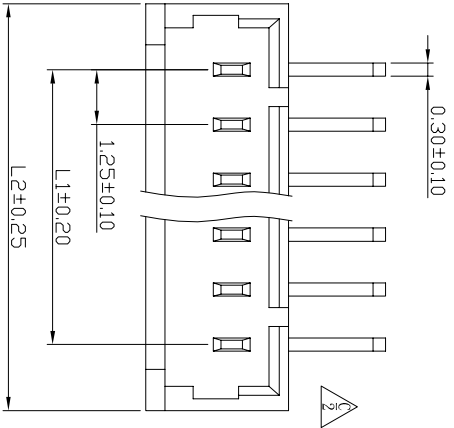

1.25±0.05



RECOMMENDED P. C. B. LAYOUT

成品規格圖

TITLE		1.25mm WAFER	APP.	ANGLES	±3°	SIZE	A4
PART NO		24W1251-XXR10-01T	CHK.	LINEAR	0.0 ±0.38	SCALE	4:1
DRW NO		24W0010	DR.	0.00±0.25	SHEET		1/1
UNIT	mm(INCH)	PROJECT		卓欽堂 94.08.23			

